



Automation for a Changing World

Delta Controller with Human Machine Interface HMC Series



High Quality Display, Precise Control: The Optimum Combination of Display and Controller

Standard Type HMC08




Manual Pulse Generator (MPG)




64K Colors TFT



DMCNET




Digital I/O



USB Disk




DMCNET



Ethernet



SD Card



Audio Output

Handheld Type HMC07 N412

New




Manual Pulse Generator (MPG)



64K Colors TFT



DMCNET



Digital I/O



Nameplate Protection



Emergency Stop



Compact Design



DMCNET



SD Card




Safety Limit Switch



64K Colors TFT



DMCNET



Digital I/O




Nameplate Protection



Emergency Stop



Compact Design



DMCNET



SD Card




DOPSoft for HMI Screen Editing and PLC Programming




Powerful Dual Processors


Equipped with two high-speed CPUs: one for HMI operation, and the other as a Digital Signal Processor (DSP). The DSP serves as a motion processor for sequence control, which guarantees execution efficiency and system performance. The DSP supports up to four major PLC programs simultaneously.

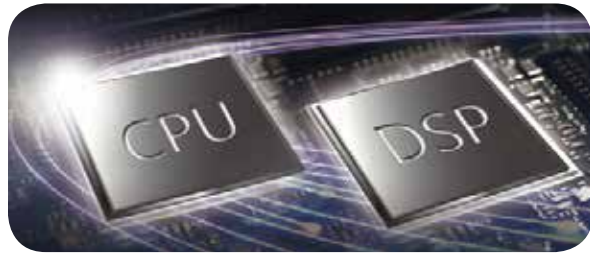

Direct Remote I/O Connection

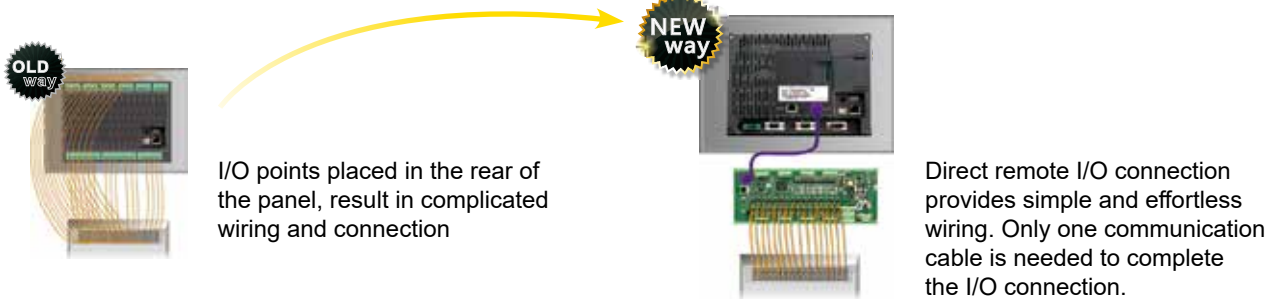

Quick PLC Ladder Monitoring

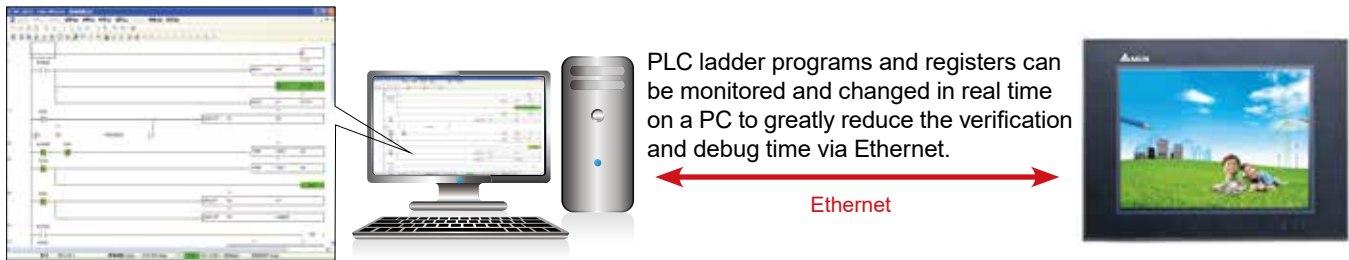

Built-in PLC ladder monitor devices allow users to display programs in real time and confirm machine operations without using a PC.

Full nameplate protection enhances tolerance to various conditions


The new handheld models are equipped with full nameplate protection to prevent oil damage of the PCB and extend product life cycle.

Built-in Motion Commands

Direct servo parameter setup and quick motion command editing, no additional communication commands are required.

Solution Structure

HMC N412 + ASDA-A3 Series

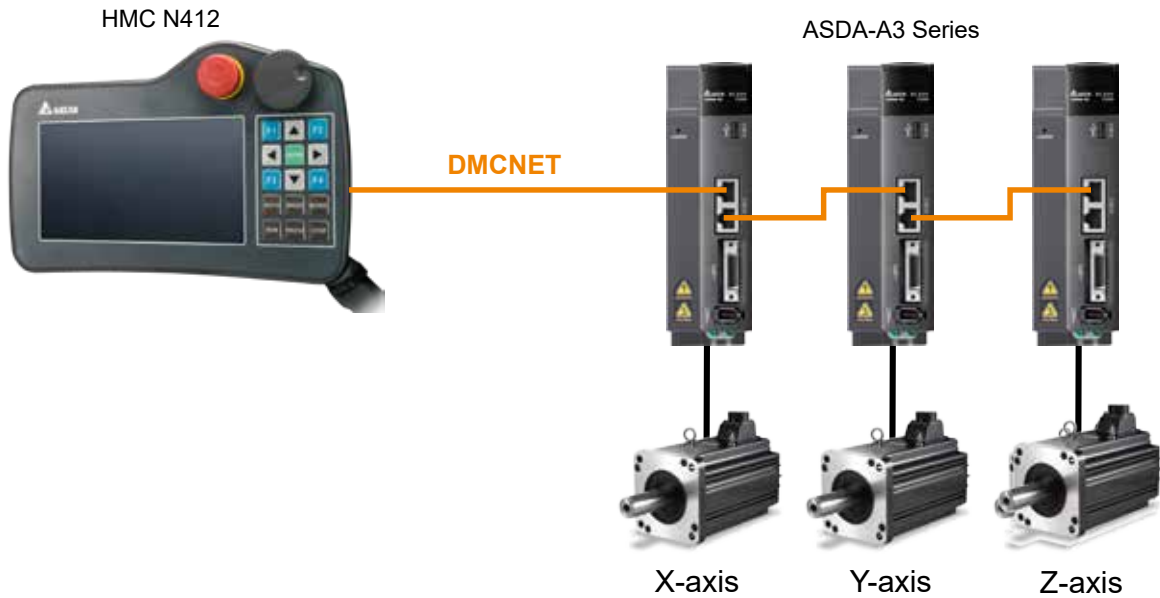


Application

Control of a Pick-an-Place Robot for an Injection Molding Machine

Features


1. The HMC integrates display and remote control functions with built-in PLC
2. High speed motion control bus for Delta Industrial PC-Based Motion Control Solution DMCNET
3. High speed remote I/O modules
4. Built-in ASD-specific motion control device

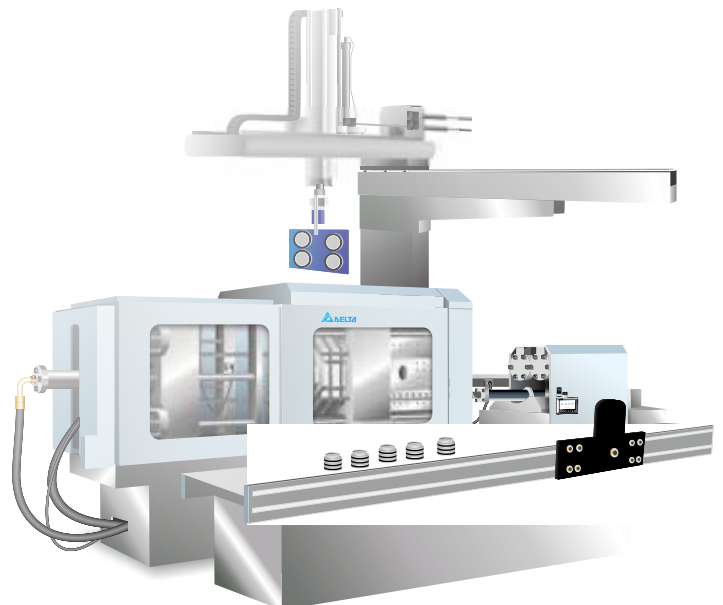

Solution Structure

HMC + AC Servo Drive & Motor ASDA-M
+ AC Servo Drive & Motor ASDA-A2

HMC + AC Servo Drive ASDA-B2
+ E2M Motors

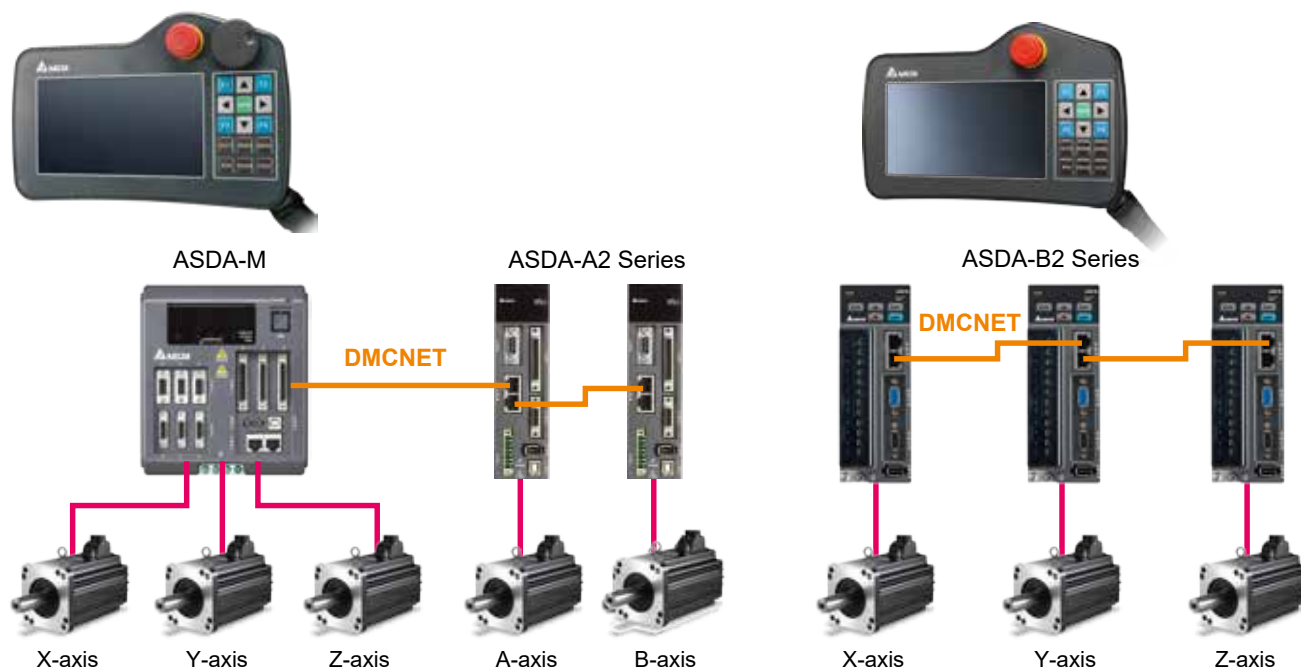

Application

Robotic Loading/Unloading for Machine Tools

Features

Distributed system bus supports various industry applications, large volume of program commands (1000 programs available, 400 edible items in each program) and dual system



New

Application Cases for Quick Implementation

- ▶ System parameter settings: including gear ratio, acceleration / deceleration time and speed

Serve Setting | 1 | DEMO | 2015/10/19 14:31:34

	Gear ratio (Mot.)	Gear ratio (Don.)	S-curve	Acc. time (ms)	Dec. time (ms)	Homing acc./dec.	Max speed (mm/s)	RPM	Dir.
X1 axis	128	1	125	10	10	600	333.333	2000	C.W.
Y1 axis	128	1	50	10	10	400	333.333	2000	C.W.
Z1 axis	128	1	240	10	10	400	333.333	2000	C.C.W.

X1 axis: 0.000 | Y1 axis: 0.000 | Z1 axis: 0.000

Operate Manual Teach I/O System Alarm Main

Motion Setting | 1 | DEMO | 2015/10/19 14:28:34

	Homing Offset (mm)	Homing Mode	Homing High speed (mm/s)	Homing Low speed (mm/s)	AutoRun speed (mm/s)	Jog speed	Torque protection (%)
X1 axis	0.000	20	50.000	20.000	121.522	100.000	1.0
Y1 axis	0.000	25	50.000	50.000	150.000	100.000	10.0
Z1 axis	0.000	25	50.000	50.000	150.000	100.000	20.0

X1 axis: -0.001 | Y1 axis: 0.000 | Z1 axis: 0.000

Operate Manual Teach I/O System Alarm Main

- ▶ Intuitive teaching interface

TEACH | 1 | DEMO | 2015/10/19 14:33:59

No. (Main Sys.) Instructions

- 1 Goto T.P., speed:5% , P1
- 2 Goto T.P., speed:5% , P2
- 3 Output[Y1]ON
- 4 Goto T.P., speed:5% , P1 , delay:1.0 Sec

Speed: 50 %
Delay before: 0.0 sec
Teach Point: 1

Cut / Delete Copy Insert Change
Clear All Paste Add Save

X1 axis: 0.000 | Y1 axis: 0.001 | Z1 axis: 0.001

Operate Manual Teach I/O System Alarm Main

- ▶ Positioning setting

Main system Teach Point coordinate

Comment	P	#X1 axis	#Y1 axis	#Z1 axis
Pos 1	1	100.000	0.000	0.000
Pos 2	2	0.000	100.000	0.000
Pos 3	3	0.000	0.000	0.000
Pos 4	4	0.000	0.000	0.000
Pos 5	5	0.000	0.000	0.000
Pos 6	6	0.000	0.000	0.000
Pos 7	7	0.000	0.000	0.000
Pos 8	8	0.000	0.000	0.000

Select T. Point: 1 | Write to Point | Read from Point

X1 axis: 0.000 | Y1 axis: 100.000 | Z1 axis: 0.000

Manual

- ▶ Operation program management

PROGRAM MANAGE | 1 | DEMO | 2015/10/19 14:33:17

No.	Program name	Modified time
1	DEMO	2015/10/19 10:52:48
2		
3	N.	2015/10/19 9:28:2
4		
5		
6		
7	3D	2015/10/19 9:26:20
8	EDIT-TEST-2	2015/10/19 9:26:8
9	EDIT-TEST	2015/10/19 9:29:34
10	LD-UL-A	2015/10/29 11:0:13

Select Program: 1

Edit selected program
Show All
Edit Template

X1 axis: -0.001 | Y1 axis: 0.001 | Z1 axis: 0.001

Operate Manual Teach I/O System Alarm Main

- ▶ Operation information

AUTO | Running Setting | 1 | DEMO | 2015/10/19 15:17:15

No. T. Points (Main Sys.) Instructions

- 1 Goto T.P., speed:5% , P1
- 2 Goto T.P., speed:5% , P2
- 3 Output[Y1]ON
- 4 Goto T.P., speed:5% , P1 , delay:1.0 Sec

Speed: 50 %
High Speed | Low Speed

Running Information


Planned cycles: 0
Remainder: 0
Cycle time: 0.00 Sec

Zero Return Run Pause Stop CycleStop Magn: 1 Hand Wheel

X1 axis: 59.825 | Y1 axis: 0.000 | Z1 axis: 0.000

Operate Manual Teach I/O System Alarm Main

► Abundant operating instructions

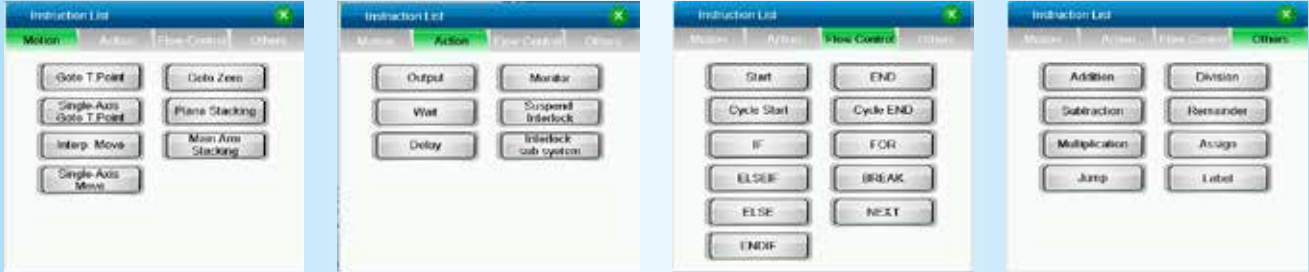



► Jog function




► Security zone setting



► Various stacking instructions

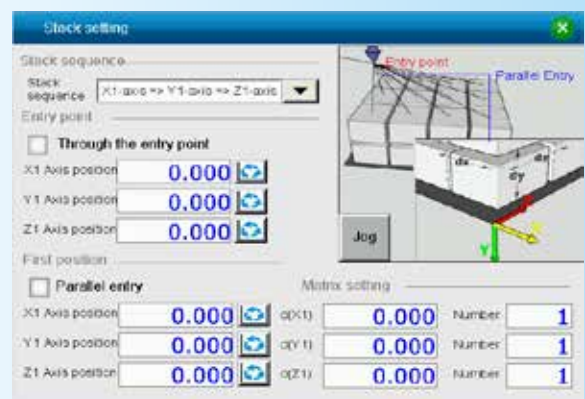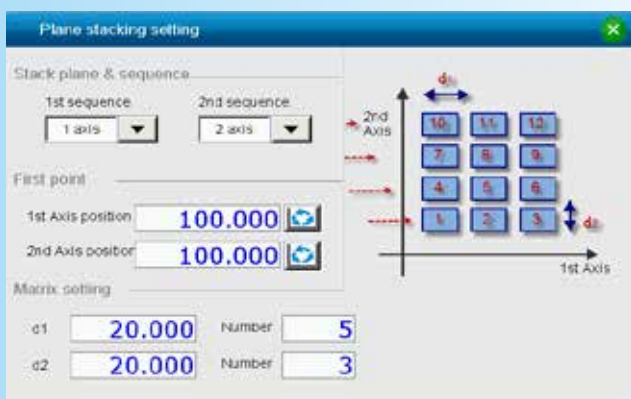

Complete Total Solution

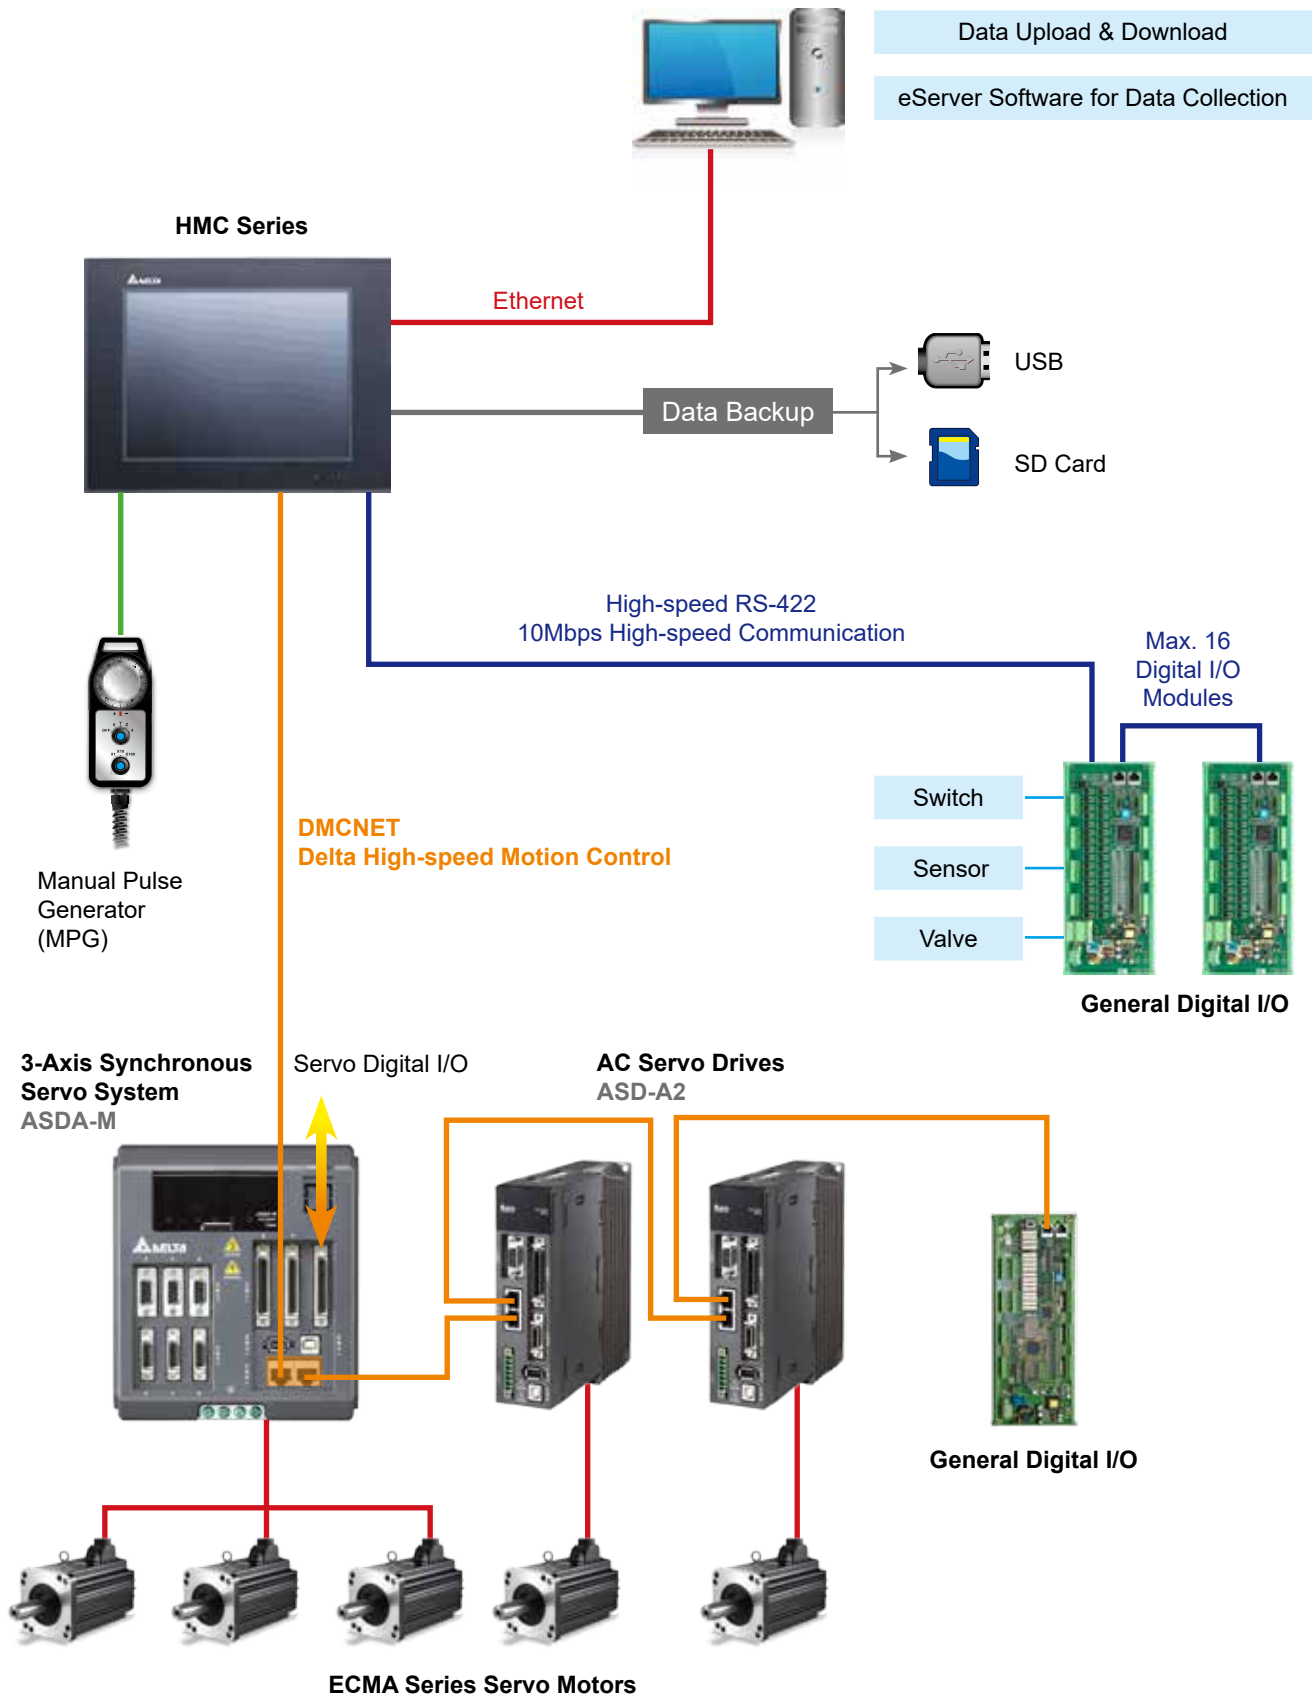




Dimensions Dimensions are in mm (in.)



NEW

Model Name HMC07-N4xx Series

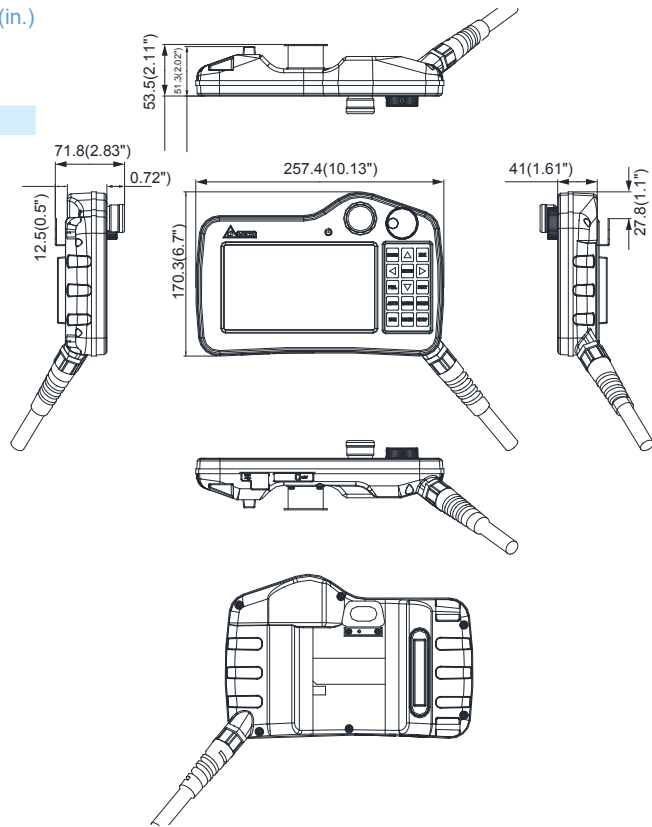

Model Name HMC08-N5xx Series

Model Name Remote I/O Module

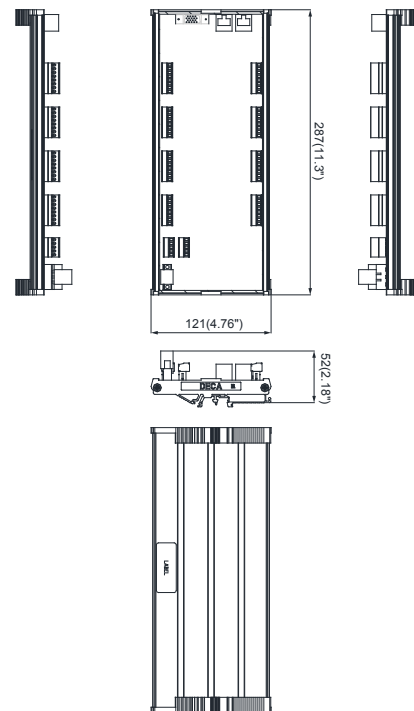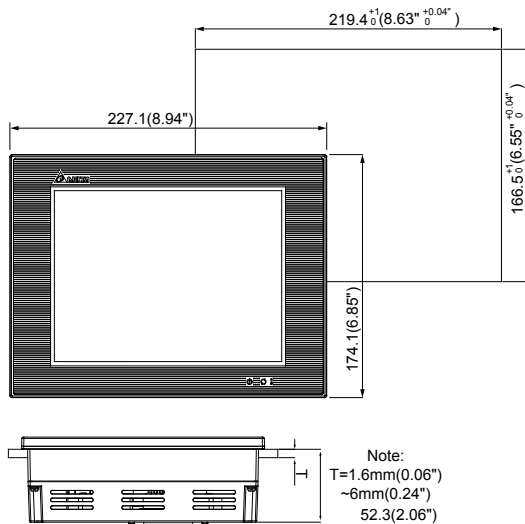

Specifications

Model		HMC07-N412H5CX	HMC07-N412H55X	HMC08-N500S52
LCD Module	Display Type	7" TFT LCD		8" TFT LCD
	Colors	65535		
	Resolution (pixels)	800x480		800x600
	Backlight	LED back light (Half-life >20k hours in 25°C environment) ¹		
	Display Size (mm)	154.08 x 85.92		162 x 121.5
Axes of Control		Max. 12 axes		
Operating System		Delta Real Time OS		
CPU	HMI	32-bit RISC Micro-controller		
	Controller	32-bit DSP		
Flash ROM (Bytes)		Flash ROM 128 MB (OS System: 30 MB / Backup: 16 MB / User Application: 82 MB)		
Backup Memory (Bytes)		16 MB ROM, 128 KB SRAM		
Buzzer		Multi-Tone Frequency (2K ~ 4 KHz) / 85 dB		
Communication Networks	Ethernet	N/A		1
	Social COM Port	RS-485 (Built-in power isolation ²)		RS-232/RS-422/RS-485 ²
	Motion Control BUS	DMCNET		
	USB	1 USB Slave Ver 2.0		1 USB Host Ver 1.1 / 1 USB Slave Ver 2.0
SD		SD/SDHC		
Emergency Stop Switch		Push-lock switch Output: 2 contacts B-contact (normally closed) x 2 Rated voltage: DC 30V Max. rated current: 500 mA Min. load allowed: 5VDC / 1 mA		N/A
3-Position Operation Switch		Only for internal register, no output signal	N/A	N/A
Manual Pulse Generator (MPG)		Only for internal register, no output signal	N/A	N/A
Function Key		15		N/A
Cable Length		The X in HMC model name indicates cable length ³		N/A
Perpetual Calendar		Built-in		
Cooling Method		Natural cooling		
Safety Certification		CE		CE/UL
Protection Rating		IP54		IP65
Voltage		DC+24V _{DC} (±15%) ⁴ (Supplied by SELV circuits isolated from MAINS by double insulation)		
Voltage Endurance		Between DC24 terminal and FG terminal: AC500V, 1 min		
Power Consumption		6W ⁵		11 W
Backup Battery		3V lithium CR2450 × 1		3V lithium CR2032 × 1
Backup Batter Life		5 years or more at 25°C, may vary due to temperature and usage condition		
Operation Temperature		0°C ~ 40°C		0°C ~ 50°C
Storage Temperature		-10°C ~ 60°C		
Operation Environment		10% ~ 90% RH 【0 ~ 40°C】, 10% ~ 55% RH 【41 ~ 50°C】, Pollution Degree 2		
Vibration		IEC61131-2 compliant 5Hz ~ 8.3Hz 3.5mm, 8.3Hz ~ 150Hz 1G		
Shock		IEC60068-2-27 compliant 11 ms, 15G Peak, X, Y, Z direction for 6 times		
Dimensions (W) x (H) x (D) mm		257.4 x 170.3 x 71.8 (Emergency stop button and hook included)		219.4 x 174.1 x 52.3
Weight		750g (Wire excluded)		about 1314g

Note:

- 1) The half-life of the backlight is defined as the original luminance being reduced by 50% when the maximum driving current is supplied to the HMI
- 2) The isolated power circuit can withstand a 1500 V for 1 minute.
- 3) X = 5 : 5m, X = A : 10m, X = F : 15m, X = K : 20m
- 4) Isolated power supply recommended
- 5) The value of the power consumption indicates the electrical power consumed by HMI with no peripheral devices connected. To ensure normal operation, it is recommended using a power supply with a capacity 1.5 ~ 2 times the value of the power consumption

Model List

Model Name	Descriptions
HMC07-N412H555	HMC 7" NORMAL WSVGA HANDLE DMC WB 5M
HMC07-N412H55A	HMC 7" NORMAL WSVGA HANDLE DMC WB 10M
HMC07-N412H55F	HMC 7" NORMAL WSVGA HANDLE DMC WB 15M
HMC07-N412H55K	HMC 7" NORMAL WSVGA HANDLE DMC WB 20M
HMC07-N412H5C5	HMC 7" NORMAL WSVGA HANDLE DMC WB 5M
HMC07-N412H5CA	HMC 7" NORMAL WSVGA HANDLE DMC WB 10M
HMC07-N412H5CF	HMC 7" NORMAL WSVGA HANDLE DMC WB 15M
HMC07-N412H5CK	HMC 7" NORMAL WSVGA HANDLE DMC WB 20M
HMC07-R412H555	HMC 7" NORMAL WSVGA HANDLE DMC WB 5M
HMC07-R412H55A	HMC 7" NORMAL WSVGA HANDLE DMC WB 10M
HMC07-R412H5C5	HMC 7" NORMAL WSVGA HANDLE DMC WB 15M
HMC07-R412H5CA	HMC 7" NORMAL WSVGA HANDLE DMC WB 20M
HMC08-N500S52	HMC 8" NORMAL SVGA STD DMC RS422 WB
HMC08-N511M52	HMC 8" NORMAL SVGA MODULE DMC WB


Electrical Specifications of Remote I/O Modules

Items / Model Name	Power Supply	Input Unit		Output Unit	
		Points	Type	Points	Type
HM-RIO3232T12	24 V _{DC}	32	NPN (Sink)	32	Transistor
Input Point Electrical Specifications			Output Point Electrical Specifications		
Input Impedance		4.7 KΩ		Max. Switching Frequency	
Max. Switching Frequency		100 kHz		500 kHz	
Active Level	Off → On	> 16.5 V _{DC}		Response Time (Relay)	On → Off
	On → Off	< 5 V _{DC}			On → Off
Response Time	Off → On	< 3 μs		-	
	On → Off	< 40 μs		-	


Items / Model Name	Power Supply	Input Unit		Output Unit	
		Points	Type	Points	Type
HMC-RIO3232RT5	24 V _{DC}	32	NPN (Sink) / PNP (Source)	16 Relay / 16 TR	Relay / Transistor
Input Point Electrical Specifications			Output Point Electrical Specifications		
Input Impedance		4.7 KΩ		Max. Switching Frequency	
Max. Switching Frequency		10 kHz		1 Hz (Relay) / 8 kHz (TR)	
Active Level	Off → On	> 16.5 V _{DC}		Response Time (Relay)	Resistive Load
	On → Off	< 5 V _{DC}			Off → On
-			Response Time (TR)	On → Off	10 ms
				Off → On	12 μs
-			Response Time (TR)	On → Off	115 μs

Model Introduction

HMC Series

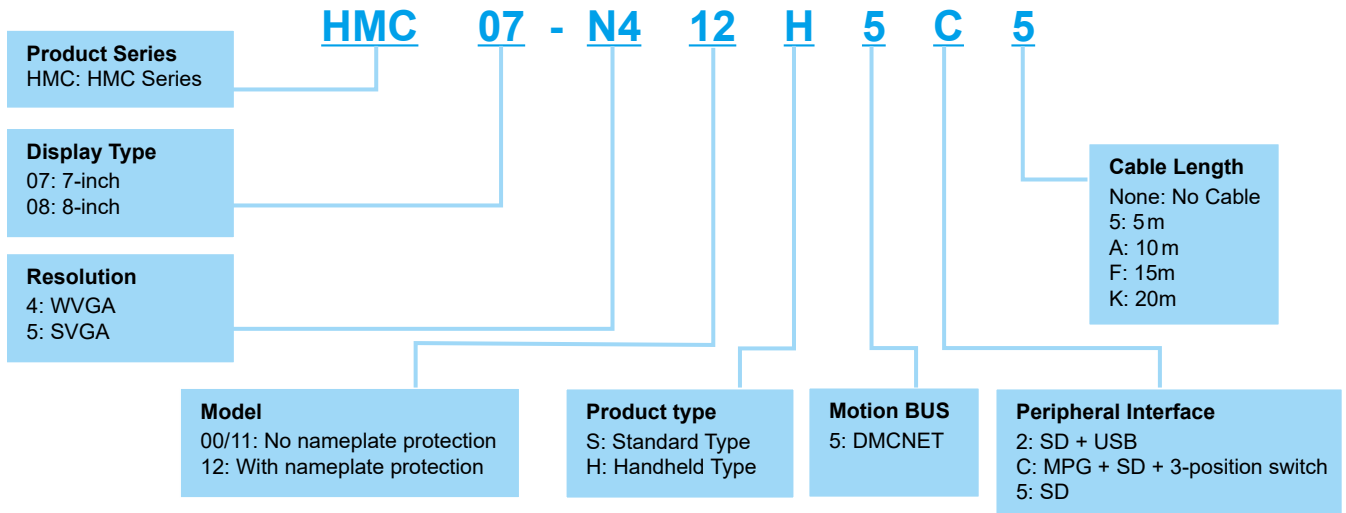

Servo Motors ECMA Series

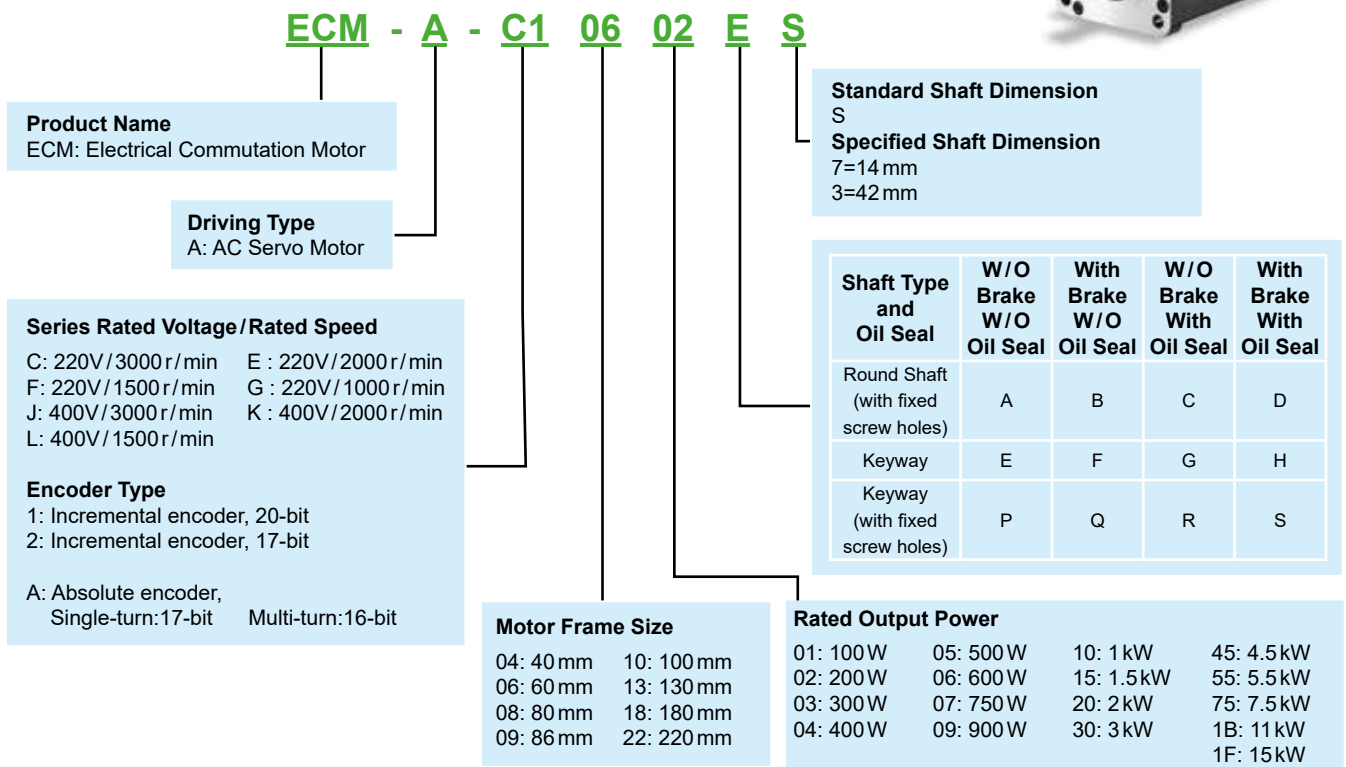

Servo Drives ASDA-M Series



ASD - M - 07 21 - F

Product Name: AC Servo Drive

Series: M

F: DMCNET

Input Voltage and Phase
 21: 220V 1-phase
 23: 220V 3-phase

Rated Output Power
 07: 750 W
 15: 1.5 kW

Servo Drives ASDA-A2 Series



ASD - A2 - 04 21 - F

Product Name: AC Servo Drive

Series: A2

F: DMCNET

Input Voltage and Phase
 21: 220V 1-phase/3-phase
 23: 220V 3-phase
 43: 400V 3-phase

Rated Output Power

01: 100 W	20: 2.0 kW
02: 200 W	30: 3.0 kW
04: 400 W	45: 4.5 kW
07: 750 W	55: 5.5 kW
10: 1.0 kW	75: 7.5 kW
15: 1.5 kW	1B: 11 kW
	1F: 15 kW

Optional Accessories

Model Name	Descriptions
HMC-CA3205C0	Handheld types HMC07-N5xx Series connection cable (5 m, 32-pin)
HMC-CA3210C0	Handheld types HMC07-N5xx Series connection cable (10 m, 32-pin)
HMC-CA1205C0	Handheld types HMC07-N5xx Series connection cable (5 m, 12-pin)
HMC-CA1210C0	Handheld types HMC07-N5xx Series connection cable (10 m, 32-pin)
NC-CAB-DMC003	DMCNET/Remote I/O connection cable (0.3 m)
NC-CAB-DMC015	DMCNET/Remote I/O connection cable (1.5 m)
NC-CAB-DMC050	DMCNET/Remote I/O connection cable (5 m)
NC-CAB-DMC100	DMCNET/Remote I/O connection cable (10 m)

Global Operations

ASIA (Taiwan)



Taoyuan Technology Center (Green Building)



Taoyuan Plant 1



Tainan Plant (Diamond-rated Green Building)

ASIA (China)



Wujiang Plant 3



Delta Electronics



ASIA (Japan)



Tokyo Office

ASIA (India)



Rudrapur Plant
(Green Building)

EUROPE




Amsterdam, Netherlands

AMERICA



Research Triangle Park

▲ Factories 8 ■ Branch Offices 117 ● R&D Centers 13 ■ Distributors 915

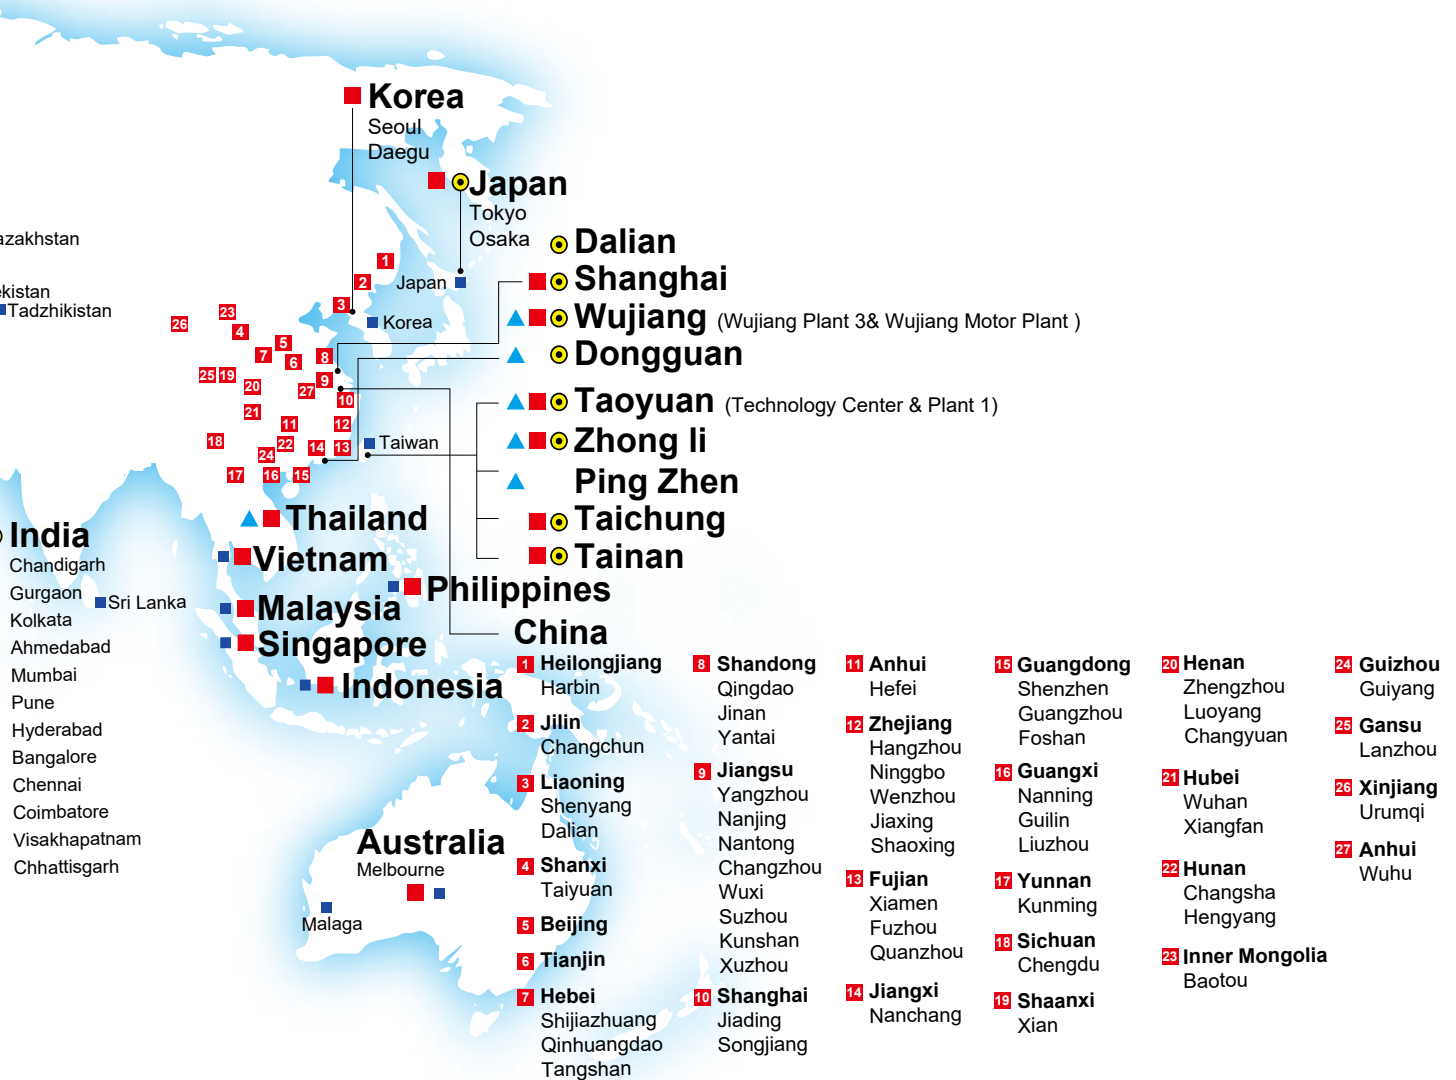



Smarter. Greener. Together.

Industrial Automation Headquarters

Delta Electronics, Inc.

Taoyuan Technology Center
No.18, Xinglong Rd., Taoyuan District,
Taoyuan City 33068, Taiwan
TEL: 886-3-362-6301 / FAX: 886-3-371-6301

Asia

Delta Electronics (Shanghai) Co., Ltd.

No.182 Minyu Rd., Pudong Shanghai, P.R.C.
Post code : 201209
TEL: 86-21-6872-3988 / FAX: 86-21-6872-3996
Customer Service: 400-820-9595

Delta Electronics (Japan), Inc.

Tokyo Office
Industrial Automation Sales Department
2-1-14 Shibadaimon, Minato-ku
Tokyo, Japan 105-0012
TEL: 81-3-5733-1155 / FAX: 81-3-5733-1255

Delta Electronics (Korea), Inc.

Seoul Office
1511, 219, Gasan Digital 1-Ro., Geumcheon-gu,
Seoul, 08501 South Korea
TEL: 82-2-515-5305 / FAX: 82-2-515-5302

Delta Energy Systems (Singapore) Pte Ltd.

4 Kaki Bukit Avenue 1, #05-04, Singapore 417939
TEL: 65-6747-5155 / FAX: 65-6744-9228

Delta Electronics (India) Pvt. Ltd.

Plot No.43, Sector 35, HSIIDC Gurgaon,
PIN 122001, Haryana, India
TEL: 91-124-4874900 / FAX : 91-124-4874945

Delta Electronics (Thailand) PCL.

909 Soi 9, Moo 4, Bangpoo Industrial Estate (E.P.Z),
Pattana 1 Rd., T.Phraksa, A.Muang,
Samutprakarn 10280, Thailand
TEL: 66-2709-2800 / FAX : 662-709-2827

Delta Electronics (Australia) Pty Ltd.

Unit 20-21/45 Normanby Rd., Notting Hill Vic 3168, Australia
TEL: 61-3-9543-3720

Americas

Delta Electronics (Americas) Ltd.

Raleigh Office
P.O. Box 12173, 5101 Davis Drive,
Research Triangle Park, NC 27709, U.S.A.
TEL: 1-919-767-3813 / FAX: 1-919-767-3969

Delta Greentech (Brasil) S/A

São Paulo Office
Rua Itapeva, 26 – 3º Andar - Bela Vista
CEP: 01332-000 – São Paulo – SP - Brasil
TEL: 55-11-3530-8643 / 55-11-3530-8640

Delta Electronics International Mexico S.A. de C.V.

Mexico Office
Gustavo Baz No. 309 Edificio E PB 103
Colonia La Loma, CP 54060
Tlalnepantla, Estado de México
TEL: 52-55-3603-9200

EMEA

Headquarters: Delta Electronics (Netherlands) B.V.

Sales: Sales.IA.EMEA@deltaww.com
Marketing: Marketing.IA.EMEA@deltaww.com
Technical Support: iatechnicalsupport@deltaww.com
Customer Support: Customer-Support@deltaww.com
Service: Service.IA.emea@deltaww.com
TEL: +31(0)40 800 3900

BENELUX: Delta Electronics (Netherlands) B.V.

De Witbogt 20, 5652 AG Eindhoven, The Netherlands
Mail: Sales.IA.Benelux@deltaww.com
TEL: +31(0)40 800 3900

DACH: Delta Electronics (Netherlands) B.V.

Coesterweg 45, D-59494 Soest, Germany
Mail: Sales.IA.DACH@deltaww.com
TEL: +49(0)2921 987 0

France: Delta Electronics (France) S.A.

ZI du bois Challand 2, 15 rue des Pyrénées,
Lisses, 91090 Evry Cedex, France
Mail: Sales.IA.FR@deltaww.com
TEL: +33(0)1 69 77 82 60

Iberia: Delta Electronics Solutions (Spain) S.L.U

Ctra. De Villaverde a Vallecas, 265 1º Dcha Ed.
Hormigueras – P.I. de Vallecas 28031 Madrid
TEL: +34(0)91 223 74 20

Carrer Llacuna 166, 08018 Barcelona, Spain

Mail: Sales.IA.Iberia@deltaww.com

Italy: Delta Electronics (Italy) S.r.l.

Via Meda 2-22060 Novedrate(CO)
Piazza Grazioli 18 00186 Roma Italy
Mail: Sales.IA.Italy@deltaww.com
TEL: +39 039 8900365

Russia: Delta Energy System LLC

Vereyskaya Plaza II, office 112 Vereyskaya str.
17 121357 Moscow Russia
Mail: Sales.IA.RU@deltaww.com
TEL: +7 495 644 3240

Turkey: Delta Greentech Elektronik San. Ltd. Sti. (Turkey)

Şerifaii Mah. Hendem Cad. Kule Sok. No:16-A
34775 Ümraniye – İstanbul
Mail: Sales.IA.Turkey@deltaww.com
TEL: + 90 216 499 9910

GCC: Delta Energy Systems AG (Dubai BR)

P.O. Box 185668, Gate 7, 3rd Floor, Hamarain Centre
Dubai, United Arab Emirates
Mail: Sales.IA.MEA@deltaww.com
TEL: +971(0)4 2690148

Egypt + North Africa: Delta Electronics

Unit 318, 3rd Floor, Trivium Business Complex, North 90 street,
New Cairo, Cairo, Egypt
Mail: Sales.IA.MEA@deltaww.com