
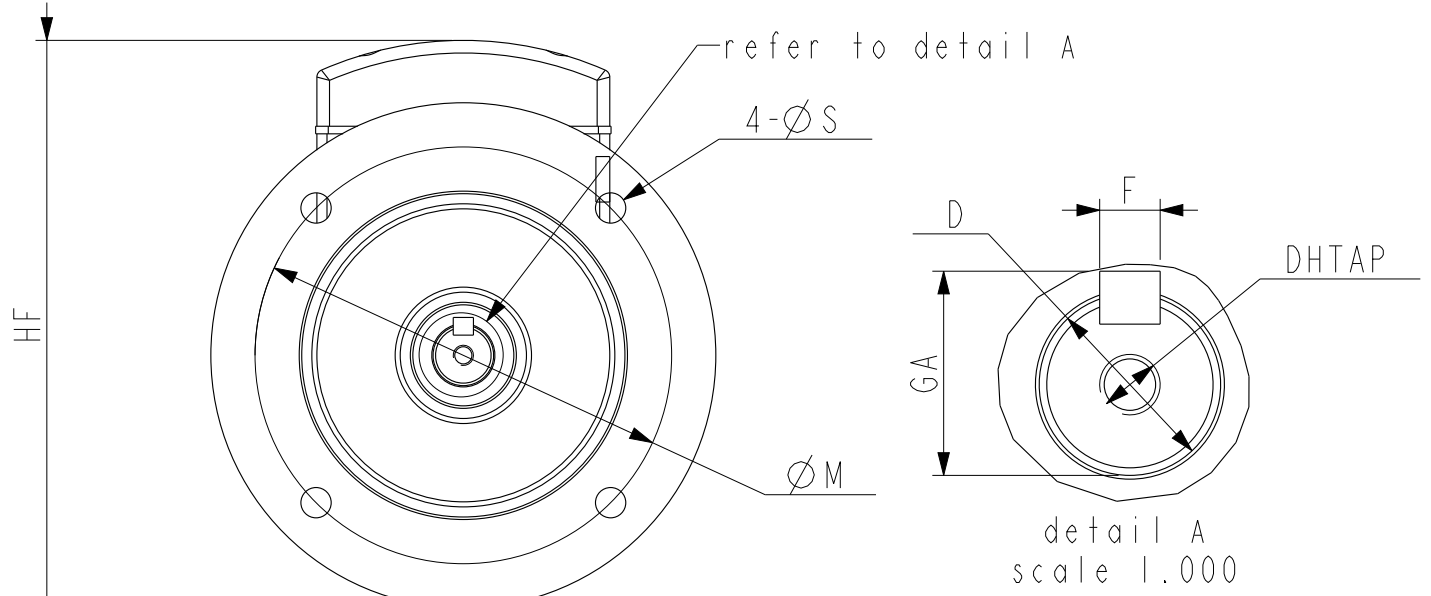


A

B

C

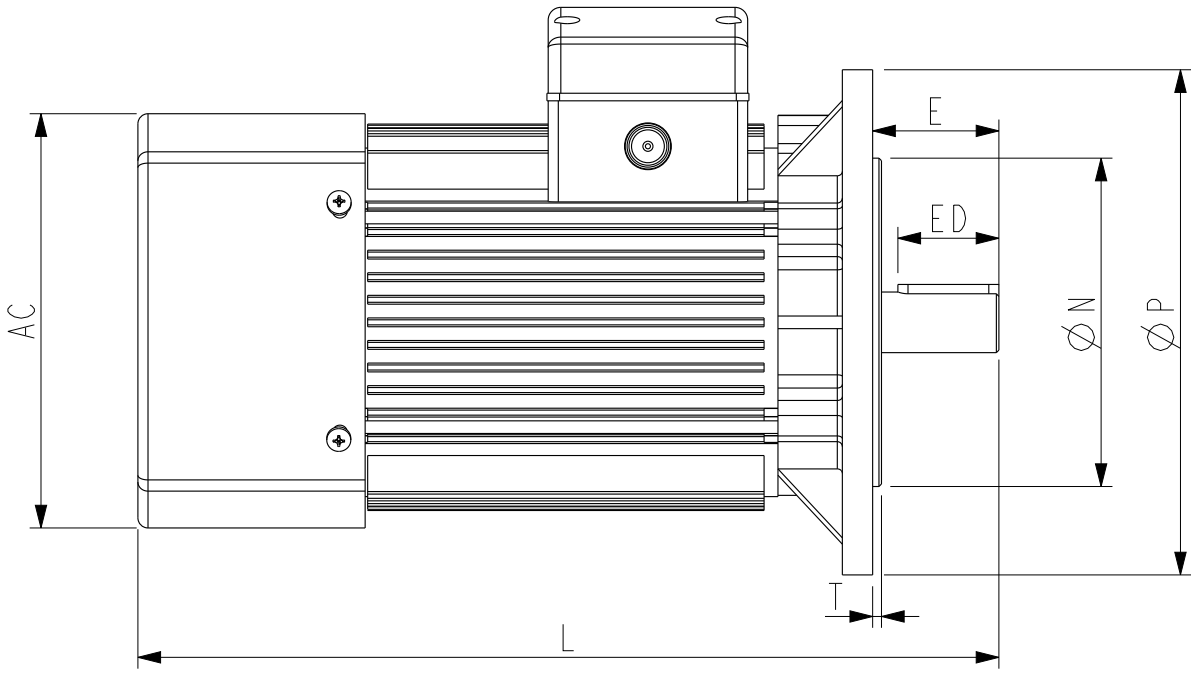

馬達序號	框號 (mm)	安裝尺寸及公差 / mm															
		AC	D	E	ED	F	GA	M	N	P	S	T	HF	L	DHTAP	前軸承形式	後軸承形式
MS175B-30CDXS2B1A MS111C-30CDXS2B1A	80_1	156	19 ^{+0.009} _{-0.004}	40±0.31	22	6 ⁰ _{-0.022}	21.5 ⁰ _{-0.11}	165	130 ^{+0.014} _{-0.011}	200±5	12 ^{+0.043} ₀	3.5 ⁰ _{-0.012}	220±5	331±5	M6X12L	6305-2Z/C3	6204-2Z/C3
MS115C-30CDXS2B1A MS122C-30CDXS2B1A	80_2	156	24 ^{+0.009} _{-0.004}	50±0.31	40	8 ⁰ _{-0.022}	27 ⁰ _{-0.29}	165	130 ^{+0.014} _{-0.011}	200±5	12 ^{+0.043} ₀	3.5 ⁰ _{-0.012}	220±5	341±5	M8X16L	6305-2Z/C3	6204-2Z/C3
MS130C-30CDXS2B1A MS140C-30CDXS2B1A	90	180	28 ^{+0.009} _{-0.004}	60±0.37	50	8 ⁰ _{-0.022}	31 ⁰ _{-0.29}	215	180 ^{+0.014} _{-0.011}	250±5	14.5 ^{+0.043} ₀	4 ⁰ _{-0.012}	262±5	382±5	M10X20L	6306-2Z/C3	6205-2Z/C3
MS155C-30CDXS2B1A MS175C-30CDXS2B1A	100	194	38 ^{+0.018} _{+0.002}	80±0.37	60	10 ⁰ _{-0.027}	41 ⁰ _{-0.29}	265	230 ^{+0.016} _{-0.013}	300±5	14.5 ^{+0.043} ₀	4 ⁰ _{-0.012}	297±5	420±10	M10X20L	6308-2Z/C3	6206-2Z/C3
MS111D-30CDXS2B1A MS115D-30CDXS2B1A	112	215	42 ^{+0.018} _{+0.002}	110±0.435	100	12 ⁰ _{-0.027}	45 ⁰ _{-0.29}	300	250 ^{+0.016} _{-0.013}	350±5	18.5 ^{+0.052} ₀	5 ⁰ _{-0.012}	350±5	473±10	M12X24L	6309-2Z/C3	6306-2Z/C3
MS118D-30CDXS2B1A	132_1	255	42 ^{+0.018} _{+0.002}	110±0.435	100	12 ⁰ _{-0.027}	45 ⁰ _{-0.29}	300	250 ^{+0.016} _{-0.013}	350±5	18.5 ^{+0.052} ₀	5 ⁰ _{-0.012}	350±5	547±10	M16X32L	6310-2Z/C3	6308-2Z/C3
MS122D-30CDXS2B1A	132_2	255	48 ^{+0.018} _{+0.002}	110±0.435	100	14 ⁰ _{-0.027}	50.5 ⁰ _{-0.29}	300	250 ^{+0.016} _{-0.013}	350±5	18.5 ^{+0.052} ₀	5 ⁰ _{-0.012}	350±5	547±10	M16X32L	6310-2Z/C3	6209-2Z/C3



台達電子工業股份有限公司
DELTA ELECTRONICS, INC.

DRAWN: eric.sh.guo

DESIGN:

APPROVE:

DATE: 2022.06.09

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DELTA ELECTRONICS, INC. AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.

DIMENSIONAL TOLERANCES

(V) () () () ANGLES

DECIMALS <50 :±0.1 <50 :±0.15 <50 :±0.2 <30° :±0.1°

X :±0.3 >50~100 :±0.15 >50~100 :±0.2 >50~100 :±0.25 >30°~60°:±0.3°

X.X :±0.2 >100~200:±0.2 >100~200:±0.25 >100~200:±0.3 >60°~90°:±0.5°

X.XX±0.1 >200~ :±0.2X >200~ :±0.25X >200~ :±0.3X

DESCRIPTION: 標準型_1M_VI_B5_3000rpm

CONFIDENTIAL

THIRD ANGLE PROJECTION

PART NO.: XXXXXXXXXX

REV. X00

USED ON

UNIT mm

SCALE 01200

SHEET 1 OF 1

A

B

C